





Profile 4800 is suitable for light to medium-heavy curtains and features the optional use of gliders or rollers.

The strength of this profile allows a greater distance between fixing bracket centres.

This is beneficial when using special clips to fix to a suspended ceiling grid where standard width ceiling tiles have to be bridged.

Standard colours: White RAL 9010, natural. Special colours on request.

HAND DRAWN WIDE TRACK # 4800


4800 > The sturdy Installation for the







Face fixing with wall bracket 5351 Top fixing with ceiling bracket 5350

Top fixing with double bracket 2216-53 and ceiling bracket 5350






27






		[mm]	a	b	с	d	e	f
		2015-05	50	-	6.5	40	16	3
	Ţ	2015-07.5	75	47	6.5	40	16	3
		2015-10	100	72	6.5	40	16	3
		2015-15	150	72	6.5	40	16	3
•		2018-15	150	57 / 57	6	80	20	4
۰.	d	2019-20	200	80	6.5	60	20	4
)-		2019-25	250	80	6.5	60	20	4
	+	2019-30	300	80	6.5	60	20	4









Specification Guide

G-Standard (bracket fixing guide)





Deflection (in mm) of the bracket 2015-15 and the stronger bracket 2018-15

Material:

Aluminium 606035-T6-F22. (Higher specification than DIN 1725). Shape and size tolerances are in accordance with DIN 17615. White RAL 9010 powder coated in accordance with the Qualicoat standard. Special colours on request. Profile weight: 231 g/m.

Accessories:

Gliders 4010 at 10 - 16 per metre with 2 end stops 4001 per length.

Installation:

Ceiling fixing with synthetic bracket 5350 or with double bracket 2216-53 in combination with ceiling bracket 5350. Face fixing with synthetic wall bracket 5351. Extension brackets 2015, 2018 and 2019 can be used in combination with ceiling bracket 5350


Bracket fixing centres (cm) in accordance with the G-Standard or the following table.

medium heavy (curtain) light 110 80 60


Minimum radius 10 cm. Bending machine 1015.

profile Bending: Minimum radius 10 cm. Ber heavier curtain.

Product example




Method for removing profile 4800 from wall bracket 5351.



Application of the special clip 2050-SYST-53, for fixing to ceiling grid.

Components

Product design and specification changes reserved.

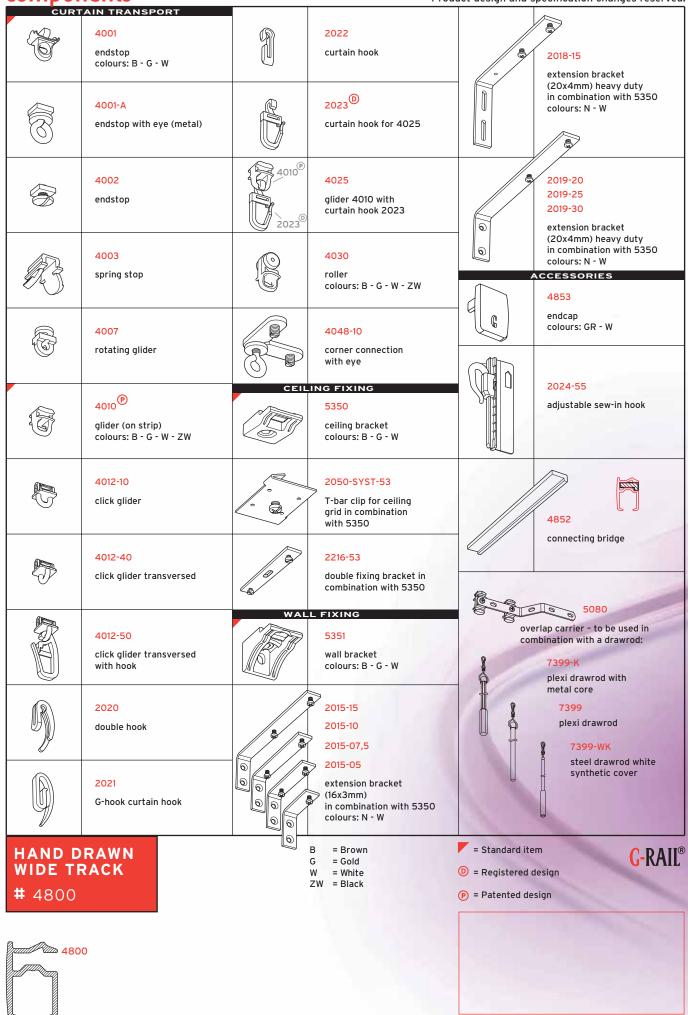

Space for dealer address

03/2004