



BLACKOUT

WIDE WIDTH

# SUNDOWN

ROLLER AND PANEL BLINDS

A textured flame retardant fabric in 9 colours.  
Sundown is a 3m wide, blackout fabric that features Greenshield.

Composition: 100% Polyester  
Fabric width: 3.00m (118")  
Weight: 400g/m<sup>2</sup> (11.8oz/yd<sup>2</sup>)



**LOUVOLITE**

# SUNDOWN

SOLAR, OPTICAL AND COLOUR FASTNESS PROPERTIES

	SOLAR			OPTICAL			UV block	SC	CF	DIM out	G VALUE				G TOT
	T <sub>s</sub>	R <sub>s</sub>	A <sub>s</sub>	T <sub>o</sub>	R <sub>o</sub>	A <sub>o</sub>					SG	DG	TG	DG LE	
Airforce Blue	0	36	64	0	34	66	100	0.65	6+	5	0.50	0.50	0.43	0.45	0.16
Aluminium Grey	0	54	46	0	67	33	100	0.48	6+	5	0.40	0.42	0.38	0.39	0.08
Black	0	6	94	0	7	93	100	0.94	6+	5	0.68	0.65	0.52	0.55	0.24
Calico	0	68	32	0	84	16	100	0.34	6+	5	0.32	0.35	0.34	0.35	0.08
Chalk	0	62	38	0	76	24	100	0.40	6+	5	0.35	0.38	0.36	0.37	0.09
Dune	0	66	34	0	82	18	100	0.36	6+	5	0.33	0.36	0.35	0.35	0.08
Navy Blue	0	9	91	0	8	92	100	0.91	6+	5	0.66	0.64	0.51	0.54	0.23
Steel Grey	0	66	34	0	82	18	100	0.36	6+	5	0.33	0.36	0.35	0.35	0.09
White	0	69	31	0	86	14	100	0.33	6+	5	0.31	0.34	0.34	0.34	0.08

T: % Transmittance  
R: % Reflectance  
A: % Absorption

UV Block: the % of UV light blocked by the fabric  
SC: Shading Co-efficient  
CF: Colour Fastness

Dim out:  
1 = High light penetration  
4 = Low light penetration  
5 = Blackout

G Value: amount of heat transmitted through the glazing  
SG: Single Glazed

DG: Double Glazed  
TG: Triple Glazed  
DG LE: Double Glazed Low Emissivity.

GTOT: The amount of heat transmitted through the combination of glass and solar shading.

## SOLAR GAIN


The amount of heat increase resulting from solar energy entering a room. It is the total of three separate parts - the amount of energy transmitted directly into the room, the energy which is absorbed by the blind and the proportion of energy which is absorbed by the window.

## SHADING CO-EFFICIENT

The solar heat gain with the blind at the window divided by the solar heat gain with no blind at the window. The lower the shading co-efficient, therefore, the higher the efficiency of the fabric. The test results in the table above have been achieved using a single 6mm glass glazing system.

## GTOT

When the G-value (a measure of total solar energy that passes through the glazing system and the blind fabric) of the glazing is combined with the value of the shading.

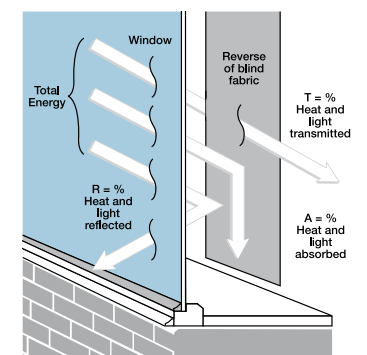

Your Louvolite® Performance Fabrics Distributor:



CI/SfB 1976 reference by SfB Agency		
(76.7)	X	

# SUNDOWN

## Fabric Composition

100% polyester

## Fabric Width

3.00m (118")

## Fabric Weight

400g/m<sup>2</sup> (11.8oz/yd<sup>2</sup>)

## Flammability Standards

Sundown meets FR standard BS 5867 Part 2 Type B. Further information is available on request.

## Colour Fastness

Tested in accordance with BS EN ISO 105-B01:1999



## Cleaning

Sundown fabrics can be wiped clean. See manufacturers instructions. Tested in accordance with BS EN 26330:1994 method 7a.

## Greenshield

Fabrics featuring Greenshield have been tested to confirm no harmful VOC's or hazardous substances will be released into the environment in quantities that are recognised as potentially dangerous to occupants of dwellings or buildings.

## Properties



White



Chalk



Calico



Dune




Aluminium Grey



Steel Grey



Airforce Blue



Navy Blue



Black

