



system 40[®] cassette



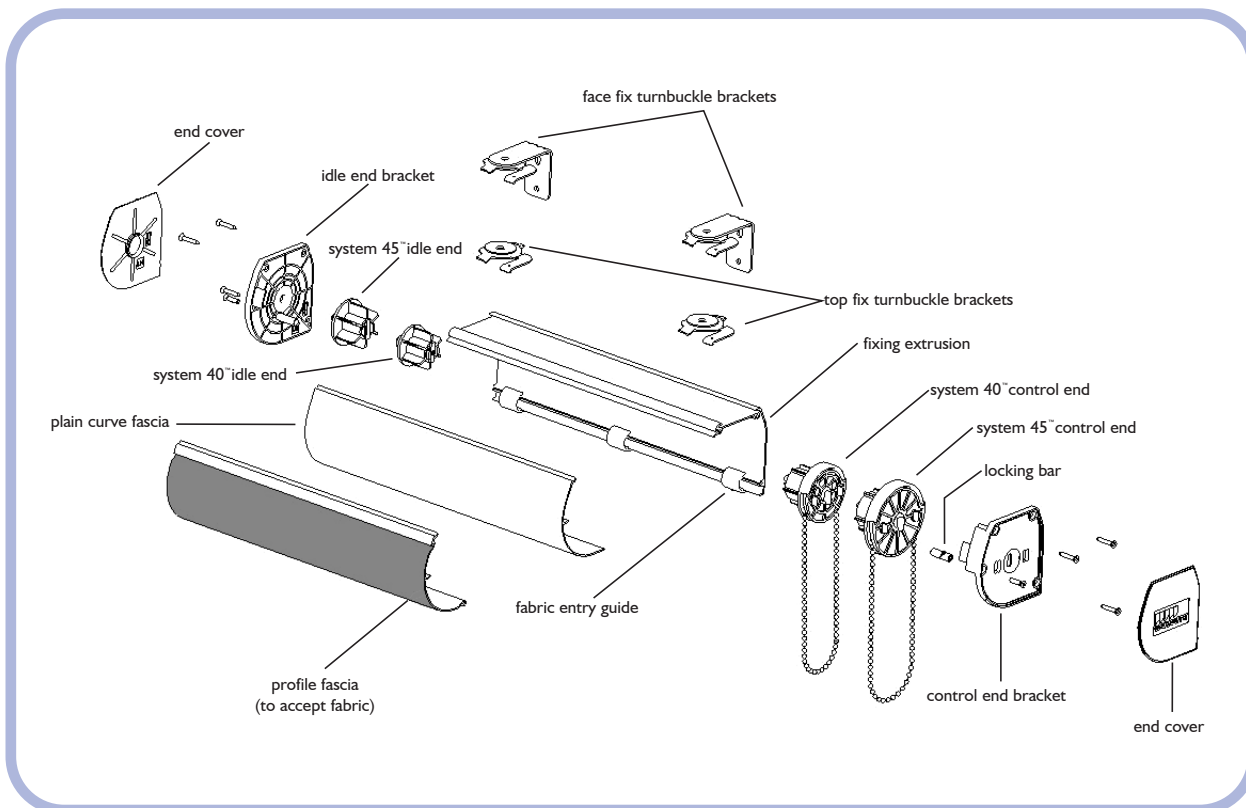

system 45[®] cassette

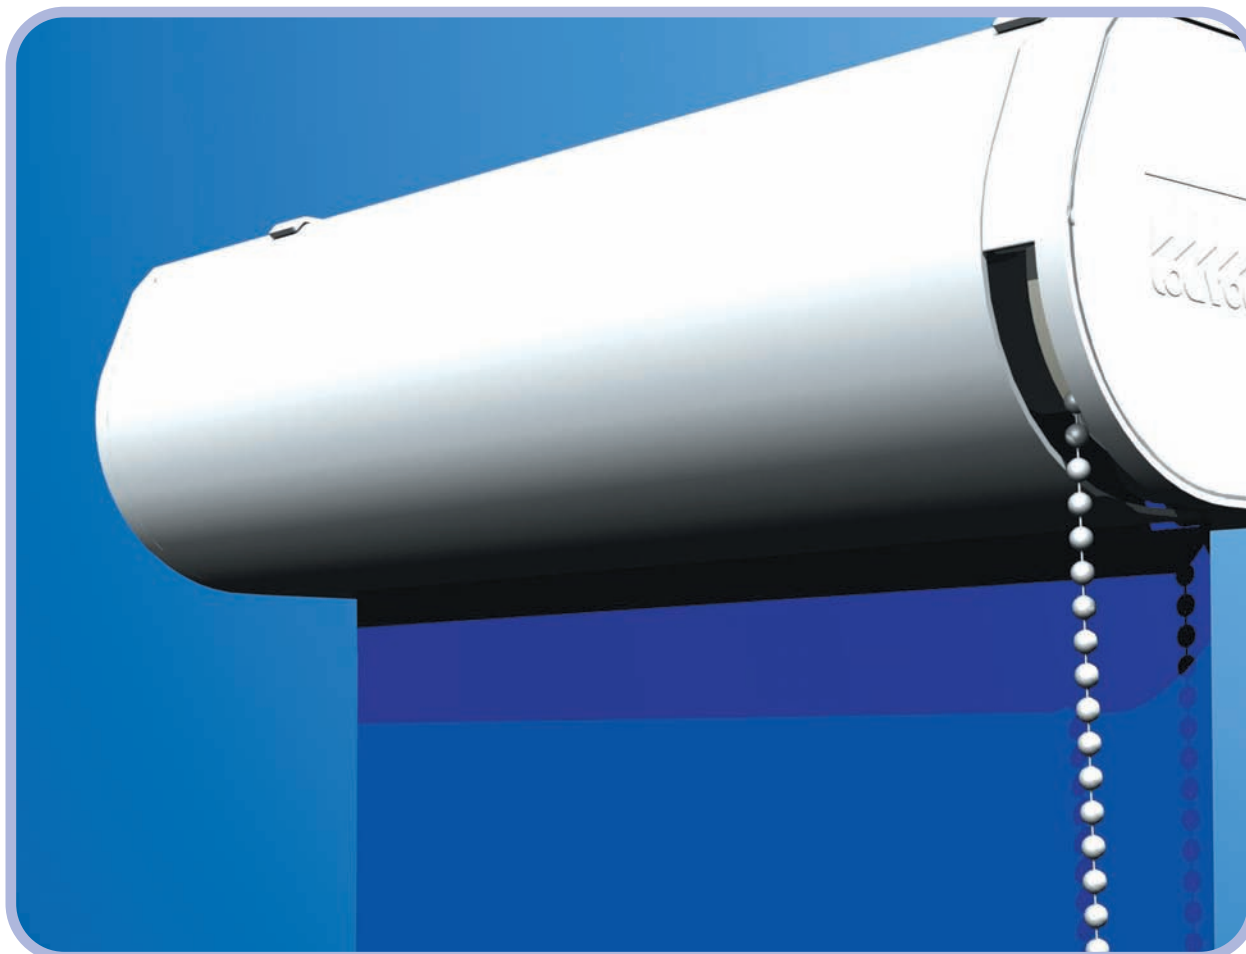



roller blind system





CI/SfB 1976 reference by SfB Agency		
(76.7)	X	












fixing extrusion	profile fascia	plain fascia	fabric entry guide
			
100% aluminium	100% aluminium	100% aluminium	acetal
4m (4½ yard) lengths	4m (4½ yard) lengths	4m (4½ yard) lengths	
dimensions 80mm (3¼") x 95mm (3¾")	dimensions 100mm (3½") x 40mm (1½")	dimensions 100mm (3½") x 40mm (1½")	
1.3mm (1/16") wall thickness	1.3mm (1/16") wall thickness	1.3mm (1/16") wall thickness	
colour white	colour white	colour white	colour white

tube system 40™	tube system 45™	tube system 45™ heavy duty	side control end system 40™
			
100% aluminium	100% aluminium	100% aluminium	sprocket/sprocket guard acetal
5m (5½ yard) lengths	5m (5½ yard) lengths 3m (3½ yard) lengths	4m (4½ yard) lengths	other parts mineral filled nylon or glass filled nylon
40mm (1½") outside diameter	45mm (1¾") outside diameter	45mm (1¾") outside diameter	spring lock friction system
1.05mm (3/64") wall thickness	1.05mm (3/64") wall thickness	4mm (3/16") wall thickness	unique bracket securing pin
4mm (3/16") fabric locating slot/ strengthening fin	4mm (3/16") fabric locating slot/ strengthening fin	4mm (3/16") fabric locating slot/ strengthening fin	metal chain drive
colour aluminium	colour aluminium	colour aluminium	colour white

side control end system 45™	plunger end for system 40™ & system 45™	brackets	bracket covers
			
sprocket/sprocket guard acetal	nylon 6	glass filled nylon	glass filled nylon
other parts mineral filled nylon or glass filled nylon			
spring lock friction system			
unique bracket securing pin			
metal chain drive			
colour white	colour white	colour white	colour white

bottom bar	bottom bar end caps	bottom bar circular	bottom bar end caps circular
			
pvc or aluminium	nylon	aluminium	nylon
5m (5½ yard) lengths		5m (5½ yard) lengths	
colour pvc = white, beige or clear aluminium = brushed aluminium	colour white, beige or clear	colour white or brushed aluminium	colour white or grey

turnbuckle bracket face fix	turnbuckle bracket top fix	no.10 operating chain	fabric drops
			<p>system 40™ and system 45™ cassette</p> <p>up to 4m (4½ yard) screen and sheerweave® fabric</p>
steel	steel	nickel plated brass/stainless steel	
		dimensions 4.5mm (3/16") diameter	
colour white	colour white	colour silver, nickel plated brass or gold	